

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 January 2004 (29.01.2004)


PCT

(10) International Publication Number  
**WO 2004/009295 A1**

- (51) International Patent Classification<sup>7</sup>: **B25B 23/00** (74) Agent: **PARRY, Simon, James**; Forrester Ketley & Co.,  
Forrester House, 52 Bounds Green Road, London N11 2  
EY (GB).
- (21) International Application Number:  
PCT/GB2003/003060
- (22) International Filing Date: 15 July 2003 (15.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0216902.7 19 July 2002 (19.07.2002) GB
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for UZ only*): **PARRY, Simon, J.** [GB/GB];  
Forrester House, 52 Bounds Green Road, London N11 2EY  
(GB).
- (72) Inventor: **STEWART, Allister** [IE/—]; "East Ingle", 20  
East Shore Lane (BM).
- Published:  
— with international search report

[Continued on next page]

(54) Title: WRENCH FOR HOLDING A BLOT OF A BOLTED CONNECTION DURING TIGHTENING OR LOOSENING

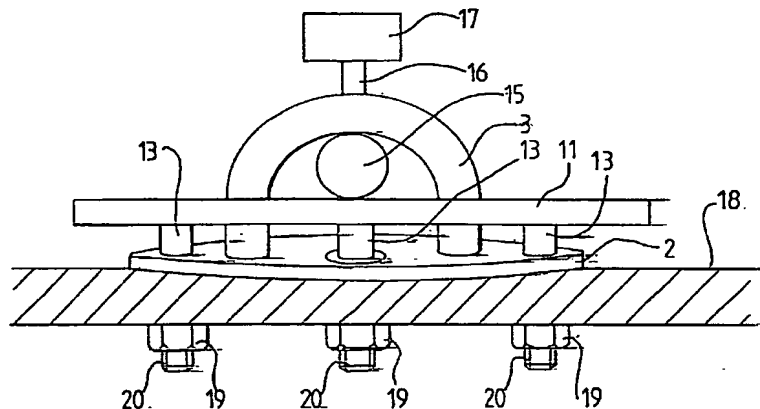

(57) Abstract: A tool (10) for use in securing a first element (1) to a second element via at least one threaded bolt (6) passing through an aperture in the first and second elements, the or each bolt having a head (7) locatable substantially adjacent the first element and a nut (19) locatable substantially adjacent the second element. The tool comprises a support structure provided with at least one formation (13) configured to engage the head (7) of the or each respective bolt, the support structure having a releasable engaging arrangement (12, 15) configured to engage releasably the first element such that the or each said formation (13) engages the head (7) of the or each respective bolt (6) to prevent rotation of the or each respective bolt (6) within said apertures as the or each nut (19) is readily engaged with a respective bolt.

WO 2004/009295 A1